

SOUNDER

ALARM SYSTEMS

LD-95 - Siren with Strobe

The LD-95 is a piezo Souder. LD-95 comes with Strobe (Flasher) which can be connected separated or with sounder to the output of control panel, therefore depending on the user one can use it as Souder only, Strobe Only or Souder with Strobe. This is ideally suitable for both indoor or outdoor application.

Indoor/Outdoor Piezo Siren w/Strobe, Red (10-14 VDC), 110 db.

Features

- Rain proof, dual strobes.
- Hi-impact, polycarbonate housing.
- Reverse polarity protection.

Technical Specifications


Power supply	10V-14 VDC
Power consumption	200mA
Siren output	110dB
Color	Red lens
Dimensions	120 (L) x 74(W) x 42(T) mm
No. of Flashes	150 times/minute



Electrical & Optical Characteristics

(Ta = 25°C)

Item	Symbol	Condition	Min	Typical	Max.	Unit
Forward Voltage	V_f	$I_f = 20 \text{ (mA)}$	1.5	1.7	2.4	V
Reverse Current	I_r	$V_r = 5 \text{ (V)}$	/	/	20	μA
Viewing Angle	$20^\circ \frac{1}{2}$	$I_f = 20 \text{ (mA)}$	/	14	/	deg
Luminous Intensity	I_v	$I_f = 20 \text{ (mA)}$	1200	1700	/	mcd
Peak Wavelength	p	$I_f = 20 \text{ (mA)}$	655	660	665	nm
Dominant Wavelength	d	$I_f = 20 \text{ (mA)}$	640	645	650	nm
Recommend Forward Current	$I_f \text{ (Rec)}$	/	/	20	/	mA

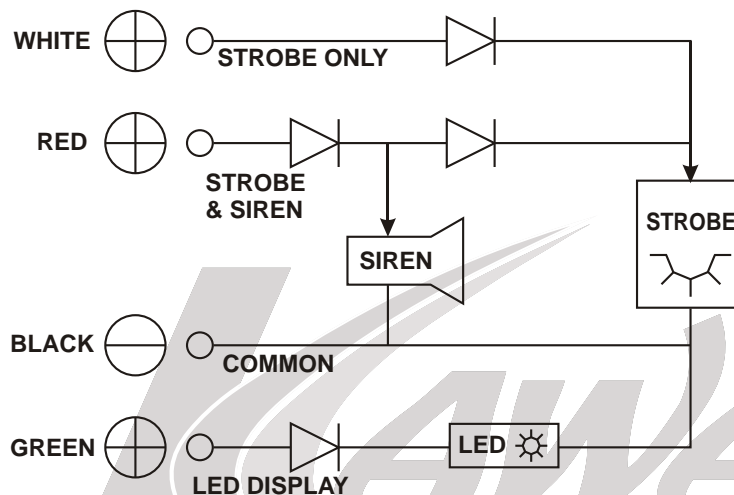

Disclaimer: While all efforts are made to maintain accuracy, the technical specifications and graphics may have inaccuracies or typographical errors. Kawach may make improvements and/or changes in any brochure at any time, without notice. The manufacturer may also change the design / specifications of the product at any time. Kawach can not be held responsible for any loss caused by the above information. For latest updates, please contact us and visit our website: www.kawach.com