

## DS-2CE72DFT-F 2 MP Full Time Color Turret Camera

ColorVu



### Key Feature

- 2 MP high performance CMOS
- 1920 × 1080 resolution
- Full time color
- 3.6 mm, 6 mm fixed lens
- Up to 20 m white light distance
- OSD menu, 3D DNR, true WDR
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the coax (HIKVISION-C)




## Specification

| <b>Camera</b>                |                                                                              |
|------------------------------|------------------------------------------------------------------------------|
| Image Sensor                 | 2 MP CMOS image sensor                                                       |
| Resolution                   | 1920 (H) × 1080 (V)                                                          |
| Frame Rate                   | PAL: 1080p@25fps<br>NTSC: 1080p@30fps                                        |
| Min. illumination            | Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light                   |
| Shutter Time                 | PAL: 1/25 s to 1/50, 000 s<br>NTSC: 1/30 s to 1/50, 000 s                    |
| Slow Shutter                 | Max. 16x                                                                     |
| Lens                         | 3.6 mm, 6 mm fixed lens                                                      |
| Horizontal Field of View     | 83.6° (3.6 mm), 52.8° (6 mm)                                                 |
| Lens Mount                   | M16                                                                          |
| Day & Night                  | Color                                                                        |
| Angle Adjustment             | Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360°                         |
| Synchronization              | Internal synchronization                                                     |
| WDR (Wide Dynamic Range)     | 130 dB                                                                       |
| <b>Menu</b>                  |                                                                              |
| AGC                          | Yes                                                                          |
| White Balance                | Auto/Manual                                                                  |
| HLC                          | Yes                                                                          |
| BLC (Backlight Compensation) | Yes                                                                          |
| Privacy Mask                 | 4 programmable privacy masks                                                 |
| Motion Detection             | 4 programmable areas                                                         |
| WDR                          | Yes                                                                          |
| Functions                    | Brightness, Sharpness, 3D DNR, Mirror, Smart light                           |
| <b>Interface</b>             |                                                                              |
| Video Output                 | 1 HD analog output                                                           |
| Switch Button                | TVI/AHD/CVI/CVBS                                                             |
| <b>General</b>               |                                                                              |
| Operating Conditions         | -40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation) |
| Power Supply                 | 12 VDC ±25%                                                                  |
| Power Consumption            | Max. 3 W                                                                     |
| Protection Level             | IP67                                                                         |
| Material                     | Main Body: Metal<br>Mounting Base: Plastic                                   |
| White Light                  | Up to 20 m                                                                   |
| Communication                | Up the coax, Protocol: HIKVISION-C (TVI output)                              |
| Dimensions                   | Ø 109.82 mm × 85.56 mm ( Ø 4.32" × 3.37")                                    |
| Weight                       | Approx. 336 g (0.74 lb.)                                                     |

## Order Model

DS-2CE72DFT-F

## Dimension

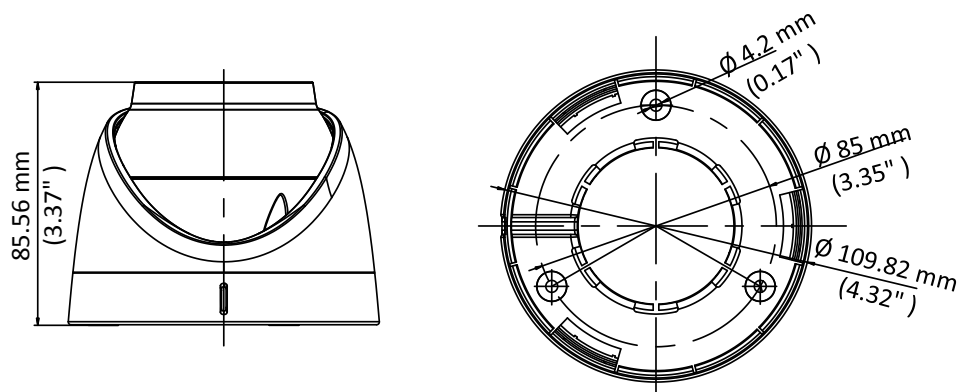

## Accessory



DS-1272ZJ-110-TRS  
Wall Mount



DS-1275ZJ-SUS  
Vertical Pole Mount



DS-1276ZJ-SUS  
Corner Mount



DS-1281ZJ-S  
Inclined Ceiling Mount



DS-1280ZJ-S  
Junction Box

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com