

Gard 3

Passage clearance up to 2.75 m




Remove Watermark Now



The ideal solution for intensive vehicular traffic conditions

- A modern style barrier, aesthetically perfect for any setting.
- The LED dome-shaped flashing light and the photocells can be integrated into the cabinet to ensure safety as well as durability.
- Protective cover, in the version with G03002 round boom, guarantees maximum safety when the boom is in motion.
- 24 V DC power supply is the ideal solution for ensuring intense duty cycle operation.
- Available with special accessories for detachable boom to use in applications where safety is a priority.

Dimensions (mm)

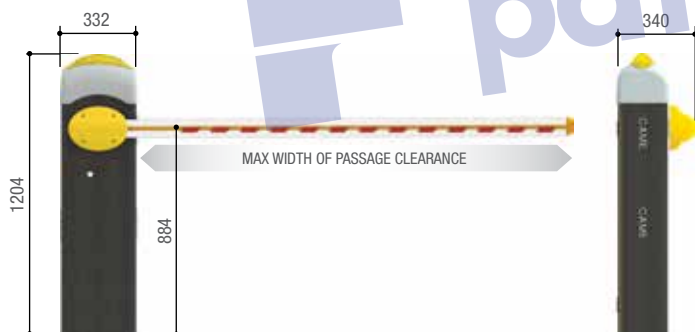

001G03000 - 001G03006

NOTES
001G03006 - Basic detachable boom fitting bracket.
Only for 001G03001 semi-oval boom

001G03005

NOTES
001G03005 - Plus detachable boom fitting bracket.
Only for 001G03001 semi-oval boom

001G03000 - Basic detachable boom fitting bracket.
Only for 001G03002 round boom

Limits to use





MODELS	G3000DX • G3000SX • G3000IDX • G3000ISX
Max width of passage clearance (m)	2.75

Technical features

MODELS	G3000DX • G3000SX • G3000IDX • G3000ISX
Protection rating (IP)	54
Power supply (V - 50/60 Hz)	120 - 230 AC
Motor power supply (V)	24 DC
Current draw (A)	15 Max.
Power (W)	300
Opening time at 90° (s)	0.9
Duty cycle (%)	INTENSIVE SERVICE
Torque (Nm)	200
Operating temperature (°C)	-20 ÷ +55
Motor thermo-protection (°C)	-

● 24 V DC

THE COMPLETE RANGE

Code	Description	Price £ (Excl. VAT)
Barrier with 24 V DC gearmotor and on-board control panel		
001 G3000DX 	Right-hand barrier in galvanised and painted steel. Fitted to take accessories.	£1,716.00
001 G3000SX 	Left-hand barrier in galvanised and painted steel. Fitted to take accessories.	£1,716.00
001 G3000IDX 	Right-hand barrier in AISI 304 satin-finished steel. Fitted to take accessories.	£2,548.00
001 G3000ISX 	Left-hand barrier in AISI 304 satin-finished steel. Fitted to take accessories.	£2,548.00
Mandatory accessories		
001 G03001	White painted aluminium boom with semi-oval section, complete with profile for covering the slot, rubber profile for impact protection, inner reinforcement, luminous cord, connection cable and red adhesive refracting strips. Boom length: 3 m.	£166.00
001 G03002	White painted aluminium boom with round section, complete with red adhesive refracting strips. Boom length: 3 m.	£78.00
Mandatory accessories for: 001G03001		
001 G04060	Ø 50 mm balancing spring. (GREEN)	£57.00
001 G03003	Hooking flange for boom with semi-oval section, complete with flange cover and cap.	£67.00
Mandatory accessories for: 001G03002		
001 G02040	Ø 40 mm balancing spring. (YELLOW)	£45.00
001 G03004	Hooking flange for boom with round section, complete with flange cover and cap.	£58.00
Accessories for: 001 G03001 (001 G02807 cannot be used)		
001 G03006	Basic detachable boom fitting bracket.	£438.00
001 G03005	Plus detachable boom fitting bracket.	£622.00
Accessories for: 001 G03002 (001 G02807 cannot be used)		
001 G03000	Detachable boom fitting bracket.	£291.00
Accessories		
001 G02801	Integrated dome-shaped flashing light.	£36.00
001 G02802	Support for applying the Dir series photocells.	£12.00
001 G02807	Fixed support.	£77.00

