

DH-IPC-HFW1300S

3Megapixel Full HD Network Small IR-Bullet Camera



Features

- 1/3" 3Megapixel progressive scan CMOS
- H.264 & MJPEG dual-stream encoding
- Max 15fps@3MP
- DWDR, Day/Night(ICR), AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 3.6mm fixed lens (6mm optional)
- Max. IR LEDs Length 30m
- IP66, PoE

DH-IPC-HFW1300S

Technical Specifications


Model		DH-IPC-HFW1300S
Camera		
Image Sensor		1/3" 3Megapixel progressive scan CMOS
Effective Pixels		2048(H)x1536(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual 1/3(4)~1/10000
Min. Illumination		Color: 0. 1Lux/F1.6; 0Lux/F1.6 (IR on)
S/N Ratio		More than 50dB
Video Output		N/A
Camera Features		
Max. IR LEDs Length		30m
Day/Night		Auto(ICR) / Color / B/W
Backlight Compensation		BLC /HLC /DWDR
White Balance		Auto/Manual
Gain Control		Auto/Manual
Noise Reduction		2D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		3.6mm (6mm optional)
Max Aperture		F1.6(F1.6)
Focus Control		Manual
Angle of View		H: 71.9°/45.3°
Lens Type		Fixed lens
Mount Type		Board-in Type
Video		
Compression		H.264/ MJPEG
Resolution		3MP(2048×1536)/1080P(1920×1080)/720P(1280×720)/D1(704×576/704×480) /CIF(352×288/352×240)
Frame Rate	Main Stream	3MP(1~15fps)/1080P(1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate		H.264: 16K ~ 8192Kbps
Audio		
Compression		N/A
Interface		N/A
Network		
Ethernet		RJ-45 (10/100Base-T)
Wi-Fi		N/A
Protocol		IPv4/IPv6, HTTP, HTTPS, TCP/IP, UDP, UPnP, ICMP, IGMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS
Compatibility		ONVIF, CGI
Max. User Access		20 users
Smart Phone		iPhone, iPad, Android, Windows Phone

DH-IPC-HFW1300S


Auxiliary Interface	
Memory Slot	N/A
RS485	N/A
Alarm	N/A
PIR Sensor Range	N/A
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	Max 4W
Working Environment	-30°C~+60°C, Less than 95%RH
Ingress Protection	IP66
Vandal Resistance	N/A
Dimensions	Φ70mm×66mm×160mm
Weight	0.42Kg

DH-IPC-HFW1300S

Dimensions (mm)

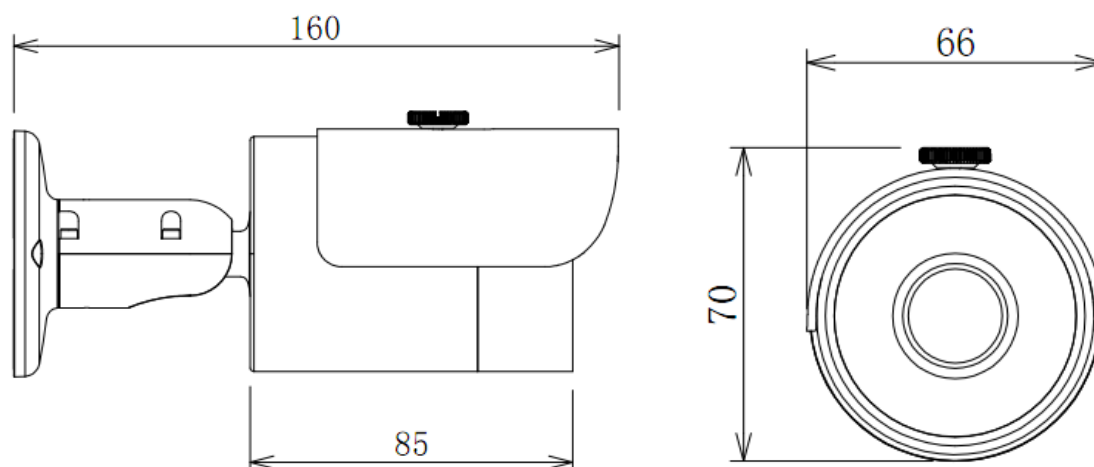

Accessory (optional)

			
PFA130	PFA122	PFA152	PFA151

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.