


Apartment Outdoor Station

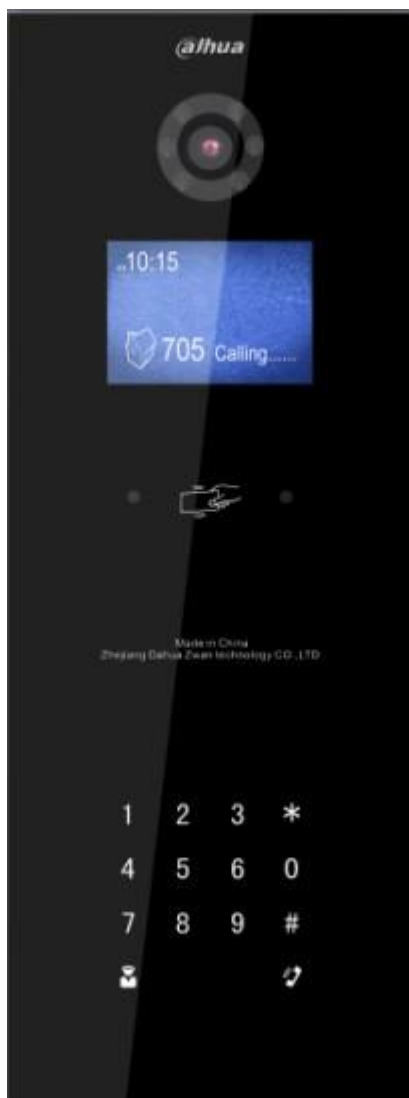

Features

- 3-inch STN screen, vivid pictures are on show
- The black-crystal glass panel, touch buttons.
- Adopt TCP/IP network host, support SNMP network protocol.
- Network security technology, provides stable and safe operating environment.
- Support night vision, voice indication
- Embedded installation
- Support card and password to open the door
- IP65


Specifications

Mode		DH-VTO1210B-X
System	Main Processor	Embedded micro processor
	Operation System	Embedded LINUX OS
Video	Video Compression Standard	H.264
	Input/Approaching Induction	1.3 megapixel CMOS camera
	Black Light	Support
	Auto Light Compensation	Support
Audio	Audio Input	Microphone
	Audio Output	Built-in speaker
	Bidirectional Talk	Support dual-way bidirectional talk
Display	LCD Dimensions	3-inch STN screen
	Resolution	128*64
Operation Mode	Input	Touch keyboard
	Card	Built-in IC card induction reader
Approaching Induction	Body Approaching	1 meter
Alarm	Vandal proof	Support
Access Control	No Output	Support
	NC Output	Support
	Door on/off Button	Support
	Door Status Detect	Support
Network	Ethernet	10M/100Mbps Self-adaptive
	Network Protocol	TCP/IP
Storage	Memory	128MB
Others	Power	DC 10~15V
	Power Consumption	Standby ≤1W, work ≤10W
	Working Environments	-40℃ — +60℃
		10% — 95%RH
	Water Proof	IP65

DH-VTO1210B-X

	Dimensions	408.0mm*150.0mm*46.4mm (L*W*T) ;
	Weight	1.6Kg;

Dimensions

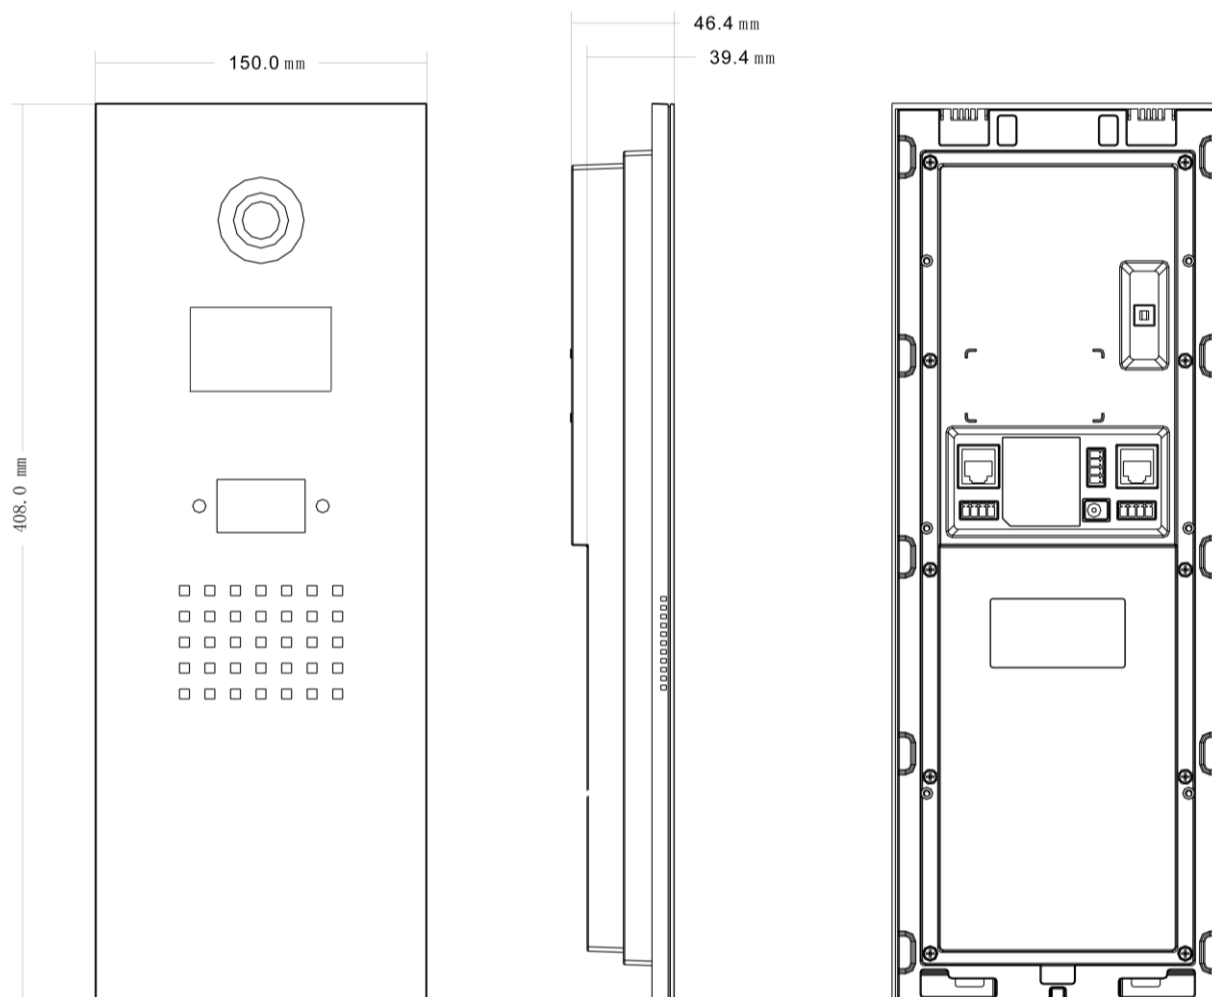

Dahua Technology Co., Ltd.

1187BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.